



CX-EPD1299L

1/2" Surface Mount RIM Strike with Preload



The CX-EPD1299L Series Grade 1 RIM Strike with Preload offers 'Universal' design that delivers unsurpassed application flexibility, with UL1034, 294, ANSI/BHMA A156.31 listings. Latch monitoring included. The patented design of this new 1/2" RIM strike enables it to operate with up to 15 pounds of preload pressure for superior performance under the most demanding conditions. This industry-leading strike design is registered under U.S. Patent 10,988,959 and Canadian Patent 3241820.

For added flexibility, 1/8" and 1/4" spacer plates are included with the strike, as well as a convenient metal mounting jig. And, like all Camden strikes, the CX-EPD1299L is backed by Camden's exclusive five-year, no-hassle product warranty.



EXCLUSIVE
PRODUCT





MORE
PERFORMANCE

Features

- 'No Cut' surface mount RIM strike for Pullman latches
- Operates with up to 15 lbs. of preload pressure
 - US Patent: 10988959
- 'Universal' design with selectable:
 - 12/24V, AC/DC operation
 - Fail Safe/Fail Secure operation
- 1/2" latch projection
- Latches operate independently of each other
- Metal mounting jig included for easy installation
- Available in stainless steel and unique all-black finish
- Heavy duty stainless steel construction
- Horizontal adjustment, spacer plate available
- Removable latch monitoring switch included
- Non-handed, left or right
- ANSI/BHMA A156.31, Grade 1 certified
- 5 year warranty

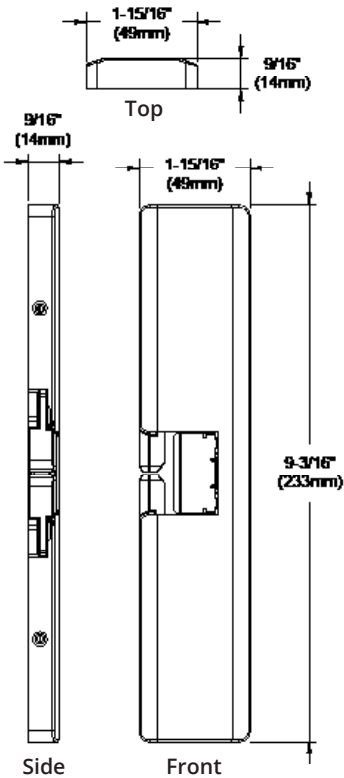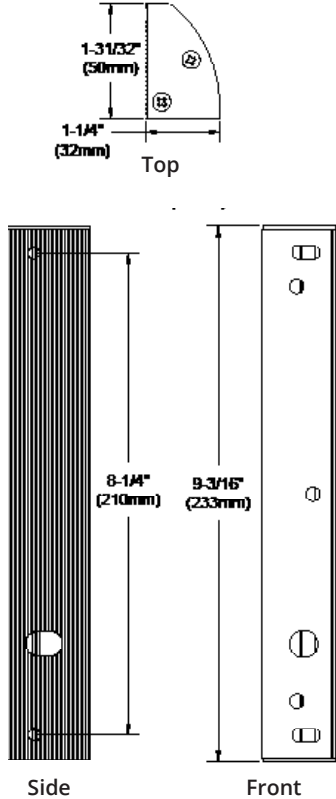

SPECIFICATIONS		DIMENSIONS	
Latch Projection: 1/2" - 3/4" with 1/8" or 1/4" Spacer Plates Voltage: 12/24V AC/D Current Draw: 560mA @12V DC 280mA @24V DC Static Strength: 1,500 lbs. (UL Verified) Dynamic Strength: 70 ft-lbs. Preload: 15 lbs. Endurance: 1,000,000 Cycles (Factory Tested) 500,000 Cycles (UL Verified) Mode: Field Selectable Fail Safe or Fail Secure Operation: AC Buzz, DC Silent Duty: Continuous Latch Monitor: SPDT, 100mA @ 24V DC, Resistive Dimensions: CX-EPD1299L: 9-3/16"H x 1-15/16"W x 9/16"D (233mm x 49mm x 14mm) CX-RIM-SB: 9-3/16"H x 1-31/32"W x 1-1/4"D (233mm x 50mm x 32mm)		CX-EPD1299L  CX-RIM-SB 	

ORDERING INFORMATION	
MODELS	
CX-EPD1299L	1/2" surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, with 'plug-in' latch monitor assembly & metal mounting jig, 1/8" and 1/4" spacer plates included.
CX-EPD1299L-BK	All-black finish, 1/2" surface mount Grade 1 RIM strike with preload, 12/24V, AC/DC, fail safe/fail secure, with 'plug-in' latch monitor assembly & metal mounting jig, 1/8" and 1/4" spacer plates included.
SPACER PLATE	
60-35E013	1/8" Spacer Plate for CX-EPD1299L Electric Strike
60-35E015	1/4" Spacer Plate for CX-EPD1299L Electric Strike
60-35E013-BK	1/8" Spacer Plate for CX-EPD1299L Electric Strike, All-Black Finish
60-35E015-BK	1/4" Spacer Plate for CX-EPD1299L Electric Strike, All-Black Finish
FILLER PLATE	
60-35E014	RIM Strike Filler Plate for use with Hager and SDC Exit Devices
SURFACE MOUNTING BOX	
CX-RIM-SB	Aluminum surface mounted adapter box for mounting EPD-1289L (or 1299L) on a double door