



PD10REXKIT-ED

INSERT INSTRUCTIONS

The PD10REXKIT-ED is a field-installable Request to Exit switch for • PD10, Falcon 16/17 & First Choice 36/37 series exit devices





B.

REX Switch Wiring
GREEN: Common
BLUE: Normally Open
GREY:Normally Closed

KIT INCLUDES

A. 60405 - (x1) REX Switch **B.** 20015 - (x1) REX Label

TOOLS REQUIRED

Phillips Screwdriver

SPECIFICATIONS

- Single Pole Double Throw (SPDT)
- Rating: .5A @24VAC
- Configuration: Green Common (C)

Blue - Normally Open (NO) Gray - Normally Closed (NC)


REX INSTALLATION INSTRUCTIONS




1. Remove (2) **Screws** from front end cap on Exit Device Push Pad & **Remove** push pad.



2. Slide push pad pin out of REAR activating bracket & set aside. Install REX switch with switch arm facing down. Re-install push pad pin.

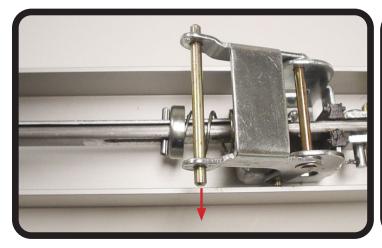

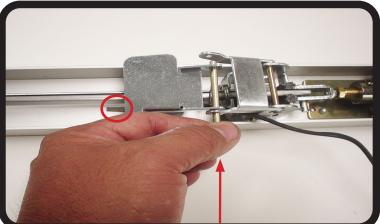


REX INSTALLATION INSTRUCTIONS




Run wires down the side of the baserail. Re-install the push pad sliding the PIN & REX bracket into the bottom channel.



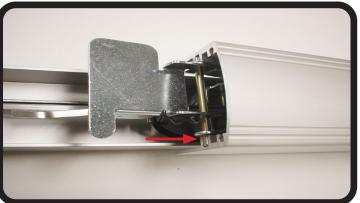

4. Slide over the FRONT activating bracket ensuring the pin & bracket is in the correct bottom channel.

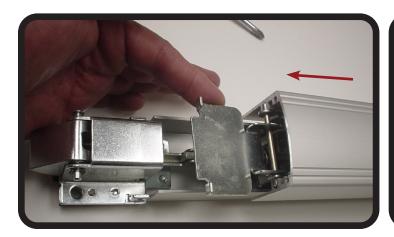



5 Re-install (2) **Screws** on front end cap on Exit Device Push Pad & test REX switch.

SPECIFICATIONS

• Single Pole - Double Throw (SPDT)

Rating: .5A @24VAC

Configuration: Green - Common (C)

Blue - Normally Open (NO) Gray - Normally Closed (NC)

