


# SCHREXKIT-CL

## INSTALLATION INSTRUCTIONS

Field Installable Rex switch for Schlage ND Cylindrical Lock. This switch is SPDT (single pull, double throw).

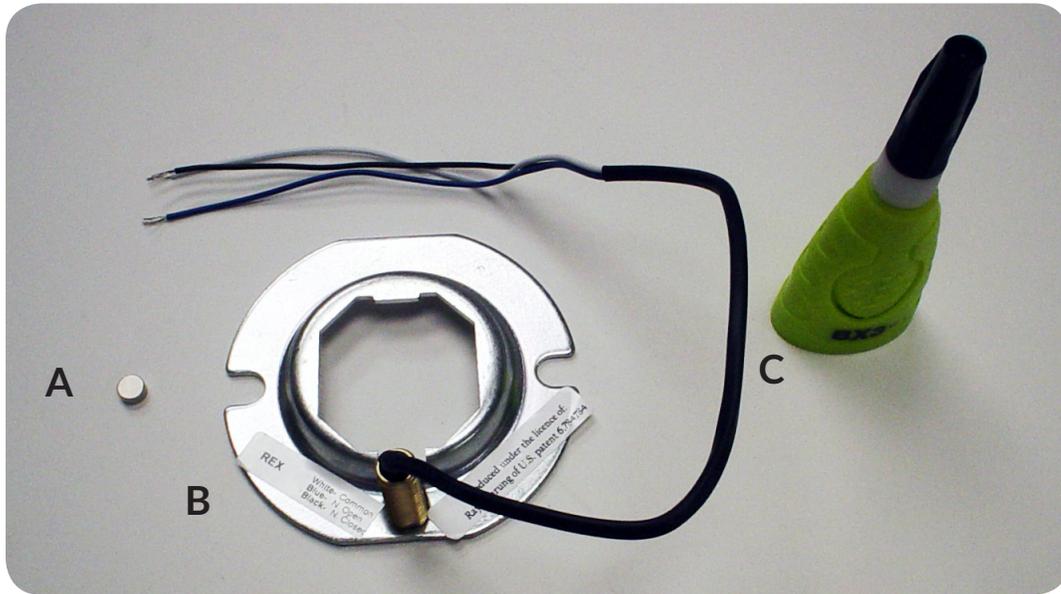

### KIT INCLUDES

- A. Magnet
- B. Anit-rotation plate w/REX switch
- C. Glue

### TOOLS REQUIRED

- None

### SPECIFICATIONS

Rating: 5A@ 24VAC/DC

Configuration: White - Common (C)  
Blue - Normally Open (NO)  
Black - Normally Closed (NC)

- Remove lock from door and clean internal spring cage.
- Place a few drops of glue on center of tab.
- Carefully center magnet onto tab.
- Allow glue to dry.
- Assemble spring cage, Anti-rotation ring, and chassis together.
- Brass stem should be aligned just above the lock power wires.
- Replace lock onto door and check for proper operation.

