

# RM300

## S E R I E S

### SECURITY MULLIONS

The ultimate security partner for both 3700 Rim and 3600 Vertical Rod devices, these removable mullions are made from steel-reinforced aluminum. A simple removal system for easy in, easy out convenience and matching anodized finishes make them the right choice for pair-of-doors applications.

Easily cut for a perfect field fit, these mullions come with heavy duty stainless steel strikes and are available in sizes up to 9 feet.


Color matched security clips provide an added level of security overcoming the natural twisting of the door stile under pressure.



*Cast aluminum brackets mount easily and allow simple removal of the mullion for full use of the opening.*

#### DIMENSIONS

- 3 1/2" Thick
- 1" width at door contact point extending 1 5/8" in rear

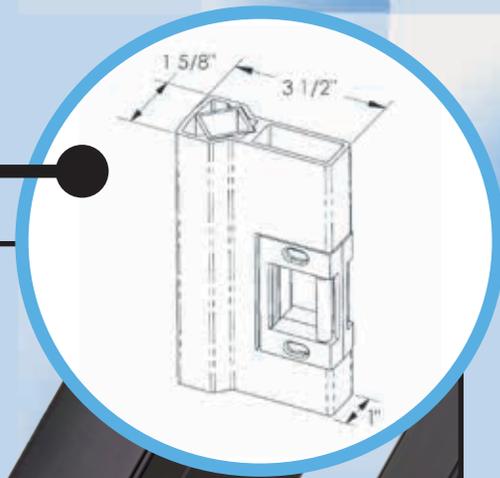

# RM300

## SERIES

### CONDENSED SPECIFICATIONS

#### APPLICATIONS

- Used with rim latching exit devices to provide a secure latching location.
- Used with vertical rod devices to seal the gap between pairs of doors.

#### DOOR/ or OTHER SIZES

- Door Heights from 86" up to 110" Standard
- Custom Sizes Available

#### PRODUCT MATERIALS

- Anodized aluminum extrusion
- Steel internal stiffening rod
- Cast aluminum brackets heavy duty stainless steel strikes

#### WARRANTY

First Choice warrants that the products manufactured by us will be free of defects in material and workmanship for a period of two years from date of invoice.



- Security Mullion shall be First Choice Building Products series RM370 model utilizing steel-reinforced aluminum with a 1" dimension at door contact point.
- The Mullion shall use an internal steel stiffening rod.
- The Mullion shall use color matched stabilizer clips to provide an added level of security overcoming the natural twisting of the door stile under pressure.
- The device shall use heavy duty stainless steel strikes.
- The RM370 series mullions can be field trimmed (for assistance call 800-793-4544)
- Check with door manufacturer for specific locating and frame preparation details