




71930

1250 Series

LCN®

Installation Instructions

1250 PULL SIDE (DOOR MOUNT) DROP PLATES

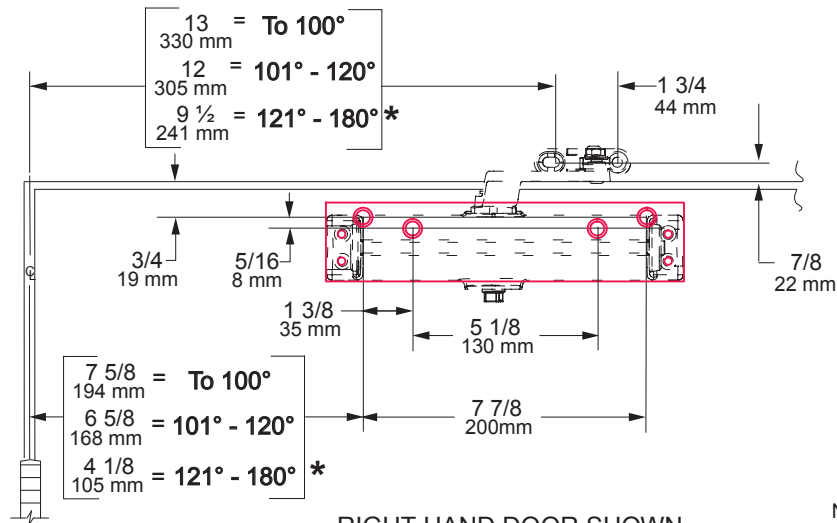
PULL SIDE ARM MOUNTED ON:
1250-18 DROP PLATERIGHT HAND DOOR SHOWN
LEFT HAND DOOR OPPOSITE

NOTES -

1. MINIMUM TOP RAIL HEIGHT IS 1 1/2".


* 2. TRIM PERMITTING.

1250 PUSH SIDE (TOP JAMB) DROP PLATES

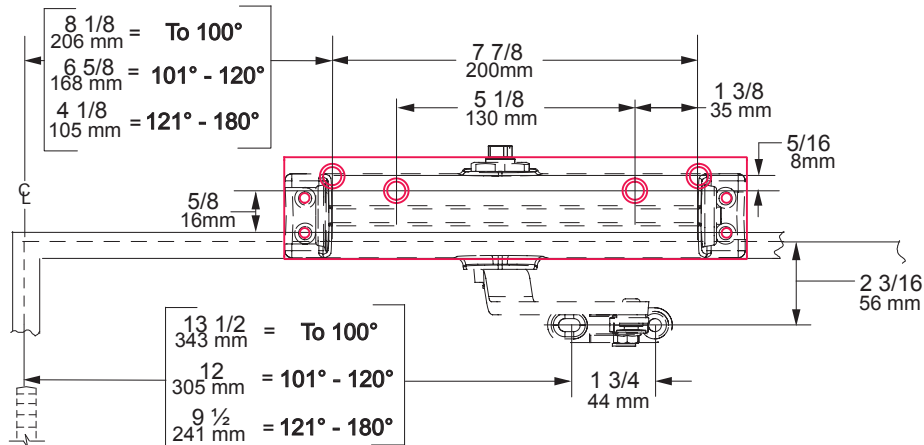PUSH SIDE ARM MOUNTED ON:
1250-18 DROP PLATELEFT HAND DOOR SHOWN
RIGHT HAND DOOR OPPOSITE

NOTES -

1. MINIMUM FACE FRAME IS 1 3/8".





1250-18

GENERAL NOTES:

1. ON TOP JAMB & HINGE FACE MOUNTS. LOCATE CLOSER & SHOE FROM CENTERLINE OF PIVOT OR SWING CLEAR HINGE PIN WHEN USED.
2. ON TOP JAMB MOUNTING WHEN OVERHEAD STOP IS USED, SHOE MUST BE LOWERED TO CLEAR HOLDER.
3. FOR 180° OPENING, MAX BUTT SIZE IS 5" X 5"
4. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS AND FRAMES.

1250 PUSH SIDE (DOOR MOUNT) DROP PLATES PUSH SIDE PARALLEL ARM MOUNTED ON: 1250-18PA DROP PLATE

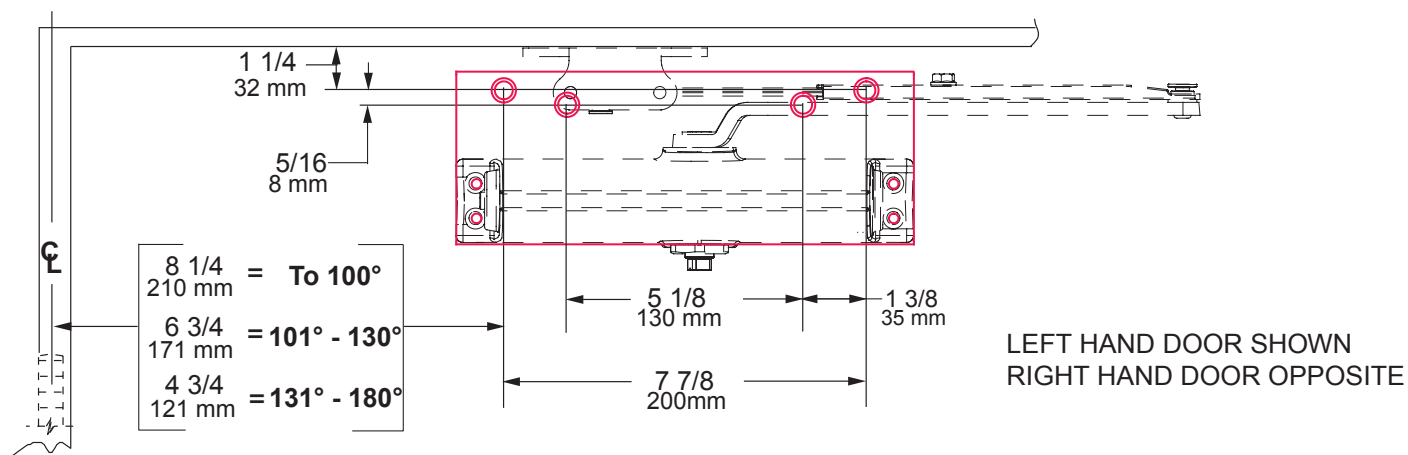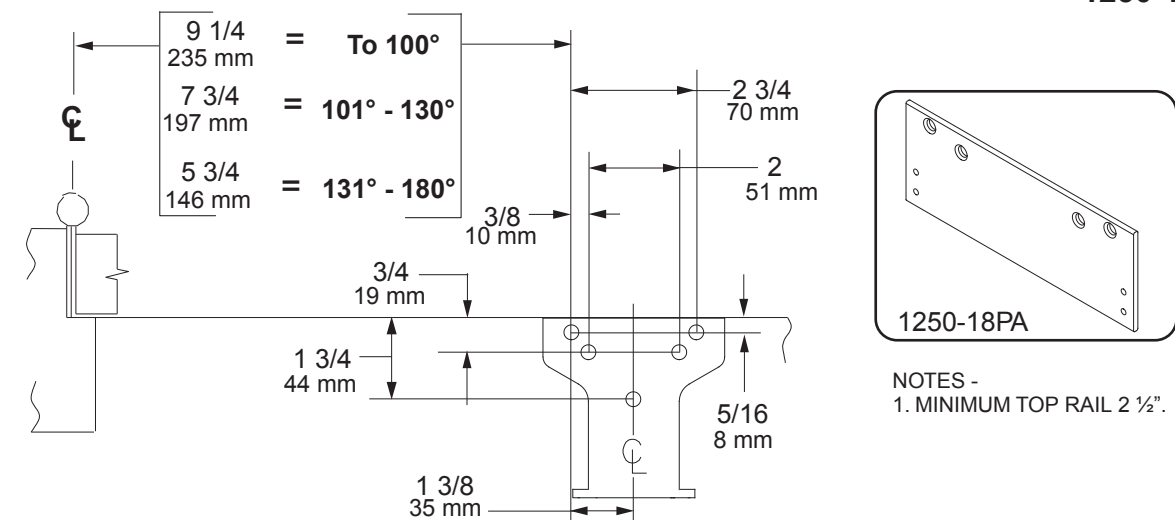


GENERAL NOTES:

1. Locate closer & shoe from centerline of pivot or swing clear hinge pin when used.
2. For 180° opening on hinge face mounts, max butt size is 5" x 5".
3. Reinforcing per ANSI/SDI-100 recommended for hollow metal doors and frames.


1250 EDA DROP PLATES

PUSH SIDE, PARALLEL ARM MOUNTED ON: 1250-18PA DROP PLATE

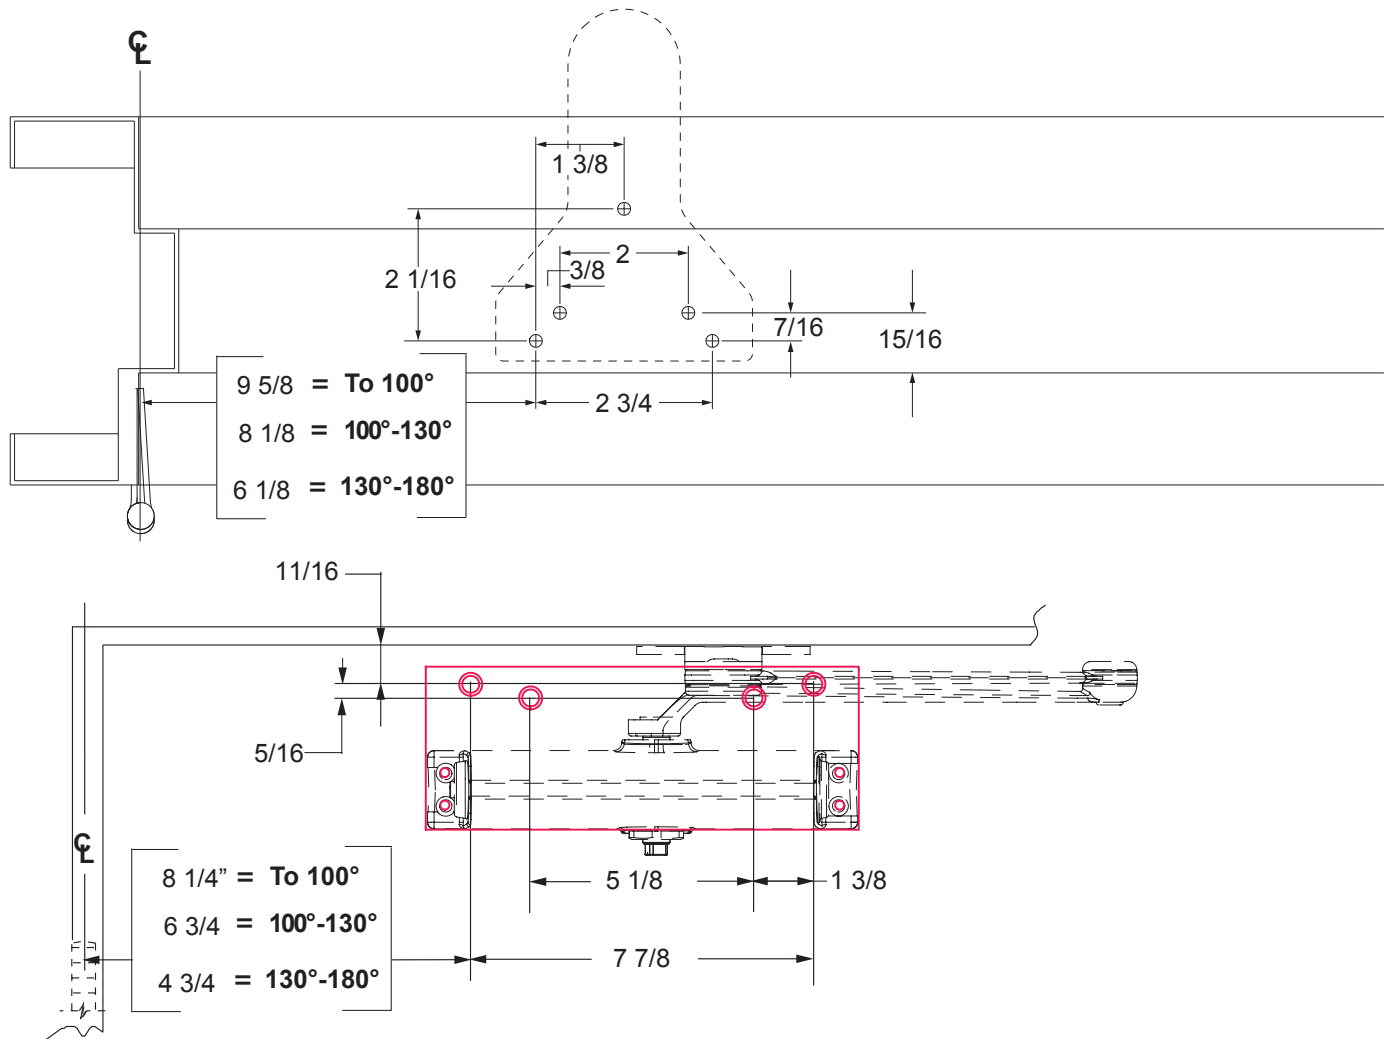

LEFT HAND DOOR SHOWN
RIGHT HAND DOOR OPPOSITE

NOTES -
1. MINIMUM TOP RAIL 2 1/2".





GENERAL NOTES:

1. IF DOOR IS HUNG ON PIVOTS OR SWING CLEAR HINGES LOCATE CLOSER AND SHOE FROM CENTER LINE OF PIVOT POINT.
2. TOP RAIL LESS THAN 4 3/4 REQUIRES DROP PLATE.
3. ALL DIMENSIONS APPLICABLE FOR HOLD OPEN.
4. REINFORCING PER. ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOOR AND FRAMES.
5. USING FASTERS PROVIDED MOUNT DROP PLATE WITH (4) 1/4 - 14 X 1 3/8 S.R.T. MOUNT CLOSER TO DROP PLATES WITH (4) 1/4 - 20 X 1/2 P.H.M.S. MAX. BUTT HINGE SIZE 5 x 5.


1250 CUSH DROP PLATES

PUSH SIDE, PARALLEL ARM MOUNTED ON: 1250-18PA DROP PLATE

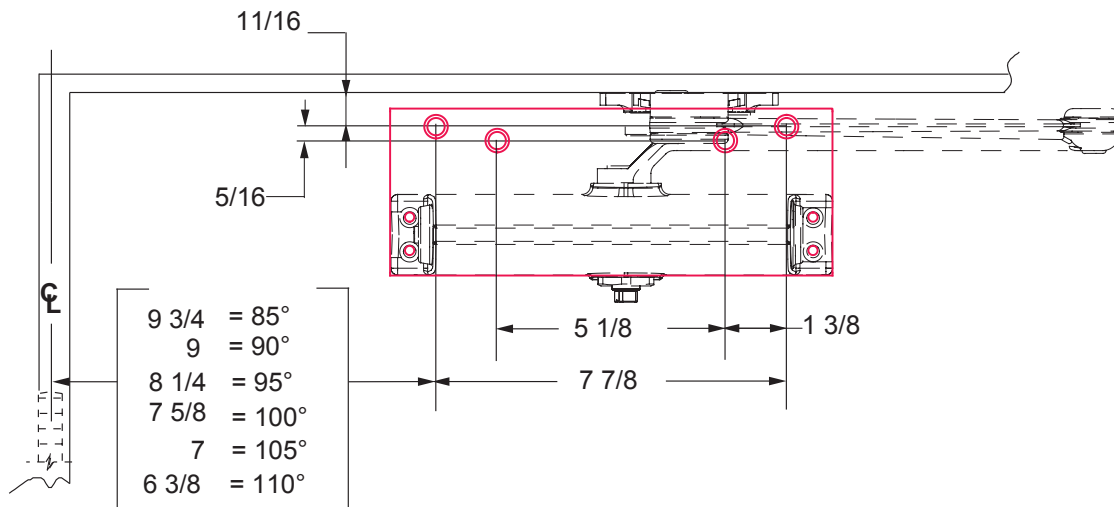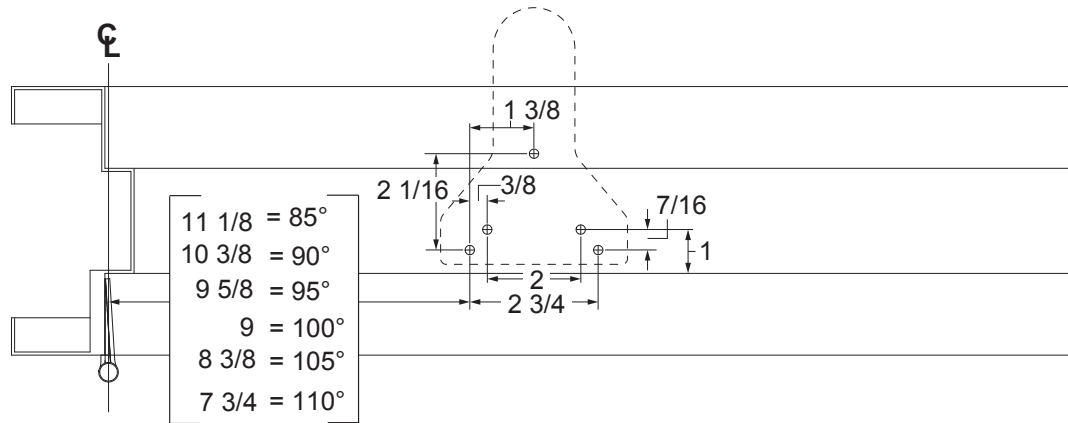

LEFT HAND DOOR SHOWN
RIGHT HAND DOOR OPPOSITE

NOTES -
1. MINIMUM TOP RAIL $2 \frac{1}{2}$ ".



1250-18PA

GENERAL NOTES:

1. IF DOOR IS HUNG ON PIVOTS OR SWING CLEAR HINGES LOCATE CLOSER AND SHOE FROM CENTER LINE OF PIVOT POINT.
2. TOP RAIL LESS THAN $4 \frac{3}{4}$ REQUIRES DROP PLATE.
3. ALL DIMENSIONS APPLICABLE FOR HOLD OPEN OR DEAD STOP.
4. REINFORCING PER. ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOOR AND FRAMES.

Customer Service

1-877-671-7011 www.allegion.com/us



© Allegion 2015
Printed in U.S.A.
71930 Rev. 01/16-a