

## 4200 Series electric strikes for cylindrical locks

### Overview

The 4200 Series electric strikes are easy to order, configure in the field and install. This makes it a great choice for commercial applications where traffic control is the primary function.

Compatible with a wide range of cylindrical devices, the 4200 series makes electrifying an opening simple. It is designed and tested to work with all Schlage and Falcon cylindrical locks as well as those of many other manufacturers.

With a variety of field configurable options, the 4200 series is able to address a broad range of needs. The power failure mode (fail safe or fail secure) can be changed in the field without disassembling the strike. The 4200 series also features a 12/24 dual-voltage solenoid for field wiring of either input voltage.

Additional factory orderable options provide even greater flexibility. The 4200 series can be ordered with or without latchbolt monitor. Square face plate is offered standard to accommodate hollow metal frames, and rounded corner faceplates are available as an option for aluminum frames. An entry buzzer and rectifier kits are also available options.

The 4200 was developed with Von Duprin's high standards and engineering expertise. Its heavy duty stainless steel construction is designed to withstand abuse.

### Features

- Field configurable 12/24 voltage utilizing dual-voltage internal solenoid
- Field configurable power failure mode (fail-safe/fail-secure)
- Non-handed, internal solenoid design
- Heavy duty stainless steel faceplate
- Latchbolt monitoring standard on 4212 only
- Optional entry buzzer and rectifier kits available for AC to DC operation
- 1 year electrical product warranty

### Lockset compatibility

The 4200 series is compatible with all Schlage and Falcon cylindrical locks as well as cylindrical and deadlatch locks of many other manufacturers.

- The 4211 is compatible with locksets with  $\frac{5}{8}$ " (15 mm) throw latchbolts, or up to  $\frac{3}{4}$ " (19mm) throw latchbolts with a  $\frac{1}{8}$ " door gap.
- The 4212 is compatible with locksets with  $\frac{1}{2}$ " (12.7mm) throw latchbolts, or up to  $\frac{5}{8}$ " (15 mm) throw latchbolts with a  $\frac{1}{8}$ " door gap.



### Technical specifications


Strike	12 VDC	12 VDC
Current (amps)	0.20 A	0.10 A
Latchbolt monitor	30 VDC	
Current (amps)	0.20 A	

The 4200 series requires a DC regulated power supply, and the Schlage PS900 series power supplies are recommended.


### Model specifications

Model number	4211	4212	
Latchbolt throw	$\frac{3}{4}$ "	$\frac{5}{8}$ "	
Latchbolt monitor switch	---	•	
Face plate length	$4 \frac{7}{8}$ "	$4 \frac{7}{8}$ "	
Backbox depth	$1 \frac{3}{8}$ "	$1 \frac{3}{8}$ "	
Lockset	Cylindrical	•	•
	Deadlatch	•	•
	Mortise	---	---
	Rim exit devices	---	---
Number of doors	Single	•	•
	Pair	---	---
Door and frame type	Hollow metal	•	•
	Aluminum	•	•
	Wood	---	---
Options	EB (entry buzzer - fail-secure only)	•	•
	SO12 & SO24 rectifier kit for AC to DC operation	•	•
	Round corner faceplate	•	•


# 4200 Series electric strikes dimensions

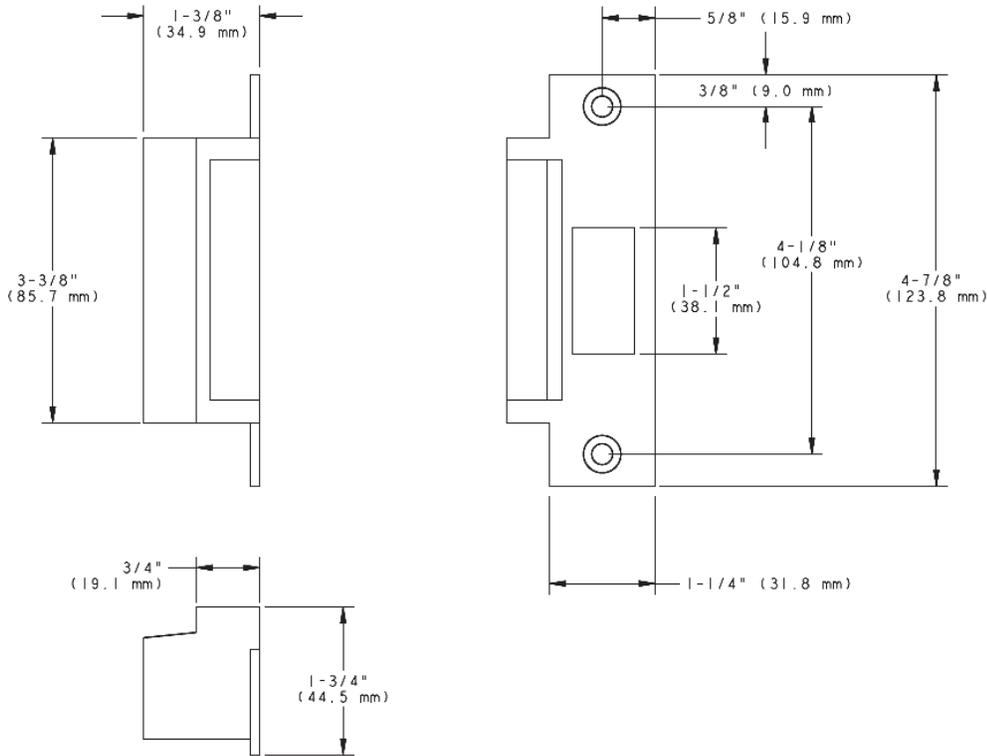


## 12 VDC strike wiring

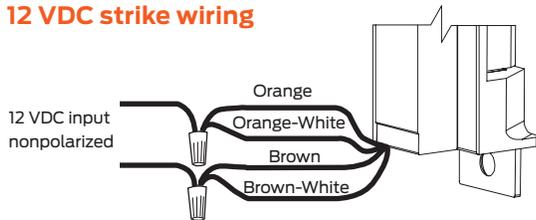

## 24 VDC strike wiring

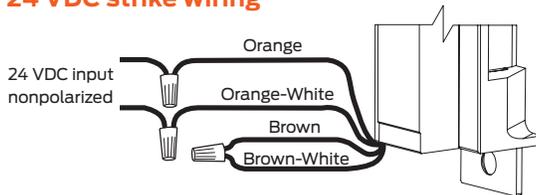

## Latchbolt monitoring switch (4212 only)

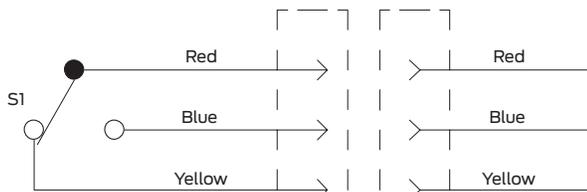

Switch shown with latch status tripper depressed

## Ordering information

4200 - S024 - EB

Model	Rectifier kit*	Buzzer*
1	2	3

\* Optional

## Selections correspond with the numbers above

1	Model
4211	See model specification chart to make the proper selection
4212	See model specification chart to make the proper selection
2	Rectifier kit (optional)
S012	Converts 12 VAC voltage to 12 VDC to operate the solenoid
S024	Converts 24 VAC voltage to 24 VDC to operate the solenoid
3	Buzzer (optional)
EB	Entry Buzzer, with fail-secure (FSE) configured

## Standard features

- Power failure mode: Field configurable fail-secure/ fail-safe
- Voltage: Field configurable 12 VDC/24 VDC dual voltage solenoid
- Finish: 630 satin stainless steel