


911375-00 Surface Vertical Rod Exit Device 98/9927



Installation Instructions



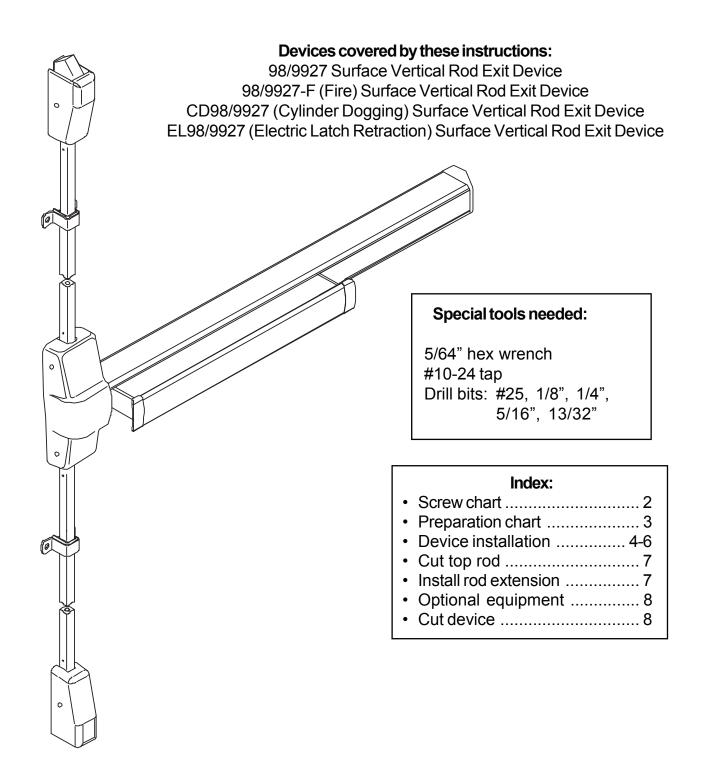


Customer Service	
1-877-671-7011	www.allegion.com/us


© Allegion 2016 Printed in U.S.A. 911375-00 Rev. 12/16-e


	SCREW CHART	
	(Surface mount or Sex bolts (1-3/4" door)
	(· · · · ·
	#10 x 1-1/4" Wood screw	— Surface mount (wood)
	- Packaged with trim -	— 990 trims (1-3/4" door)
	(]	— 990 trims (2-1/4" door)
B	() [1][[][[][]]]] #10-24 X 3/4"	 Surface mount or Sex bolts (1-3/4" door)
	(]] #10-24 X 1-1/8"	- Sex bolts 2-1/4" door
	#10 x 1-1/4" Wood screw	- Surface mount (wood)
C .	(1111115) #10-16 x 3/8" Thread cutting	- Endcap
	1/4-20 X 3/4"	— 1-3/4" door
	1/4-20 X 1-1/4"	— 2-1/4" door
e III	#10-24 X 3/4"	— Metal frame
	#10 x 1-1/2" Wood screw	— Wood frame
6	#10-12 x 10-24 x 1-1/4" Combination –	— Metal or wood frame
C i	#10-12 x 10-24 x 1-1/4" Combination	— Variable floor surfaces
	#8-32 X 1/4" —	- Latch covers
	(— Metal or wood door
	#8-18 x 3/8" Thread cutting	- Center case cover


PREPARATION CHART

Go to instructions on next page before using Preparation Chart

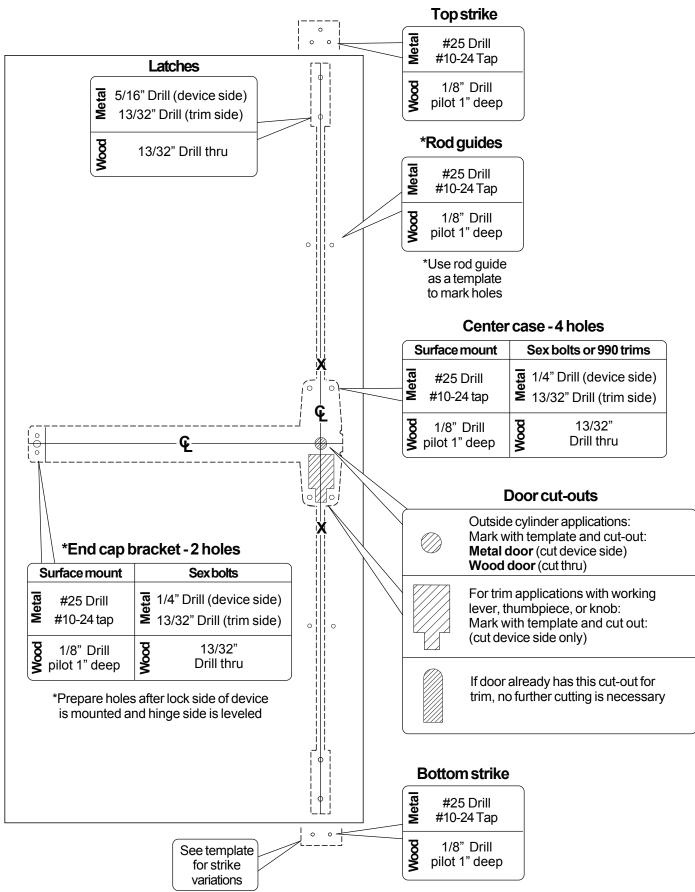

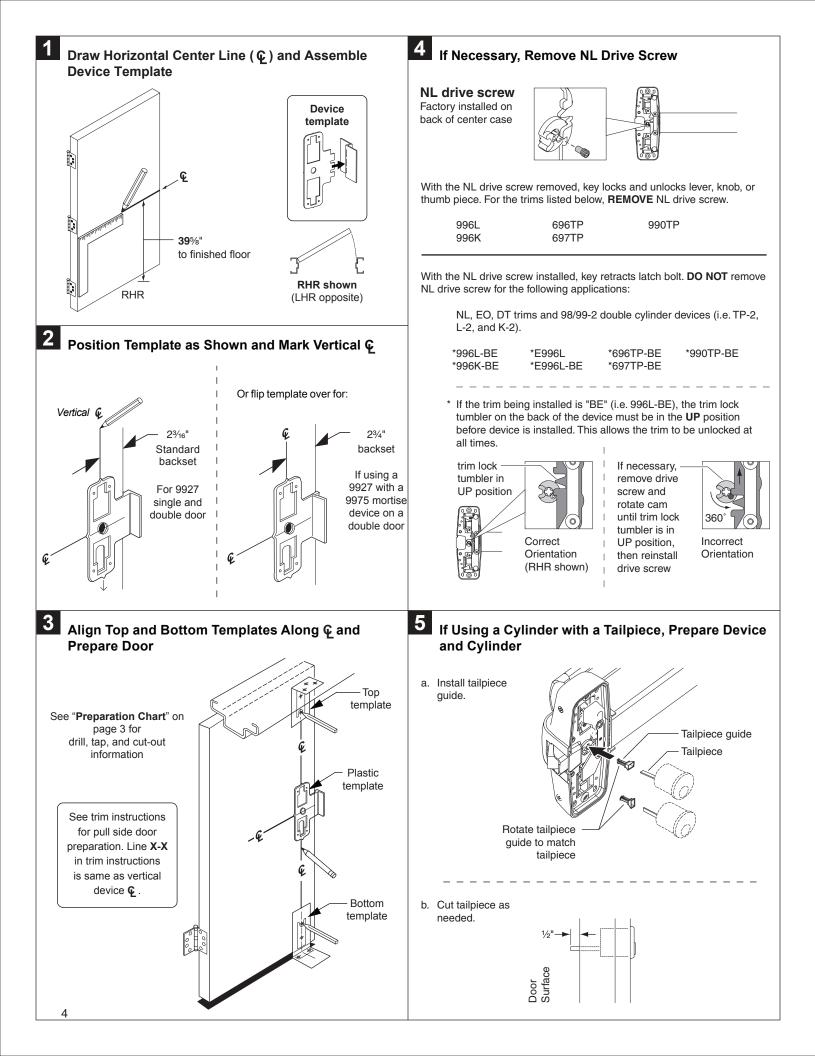

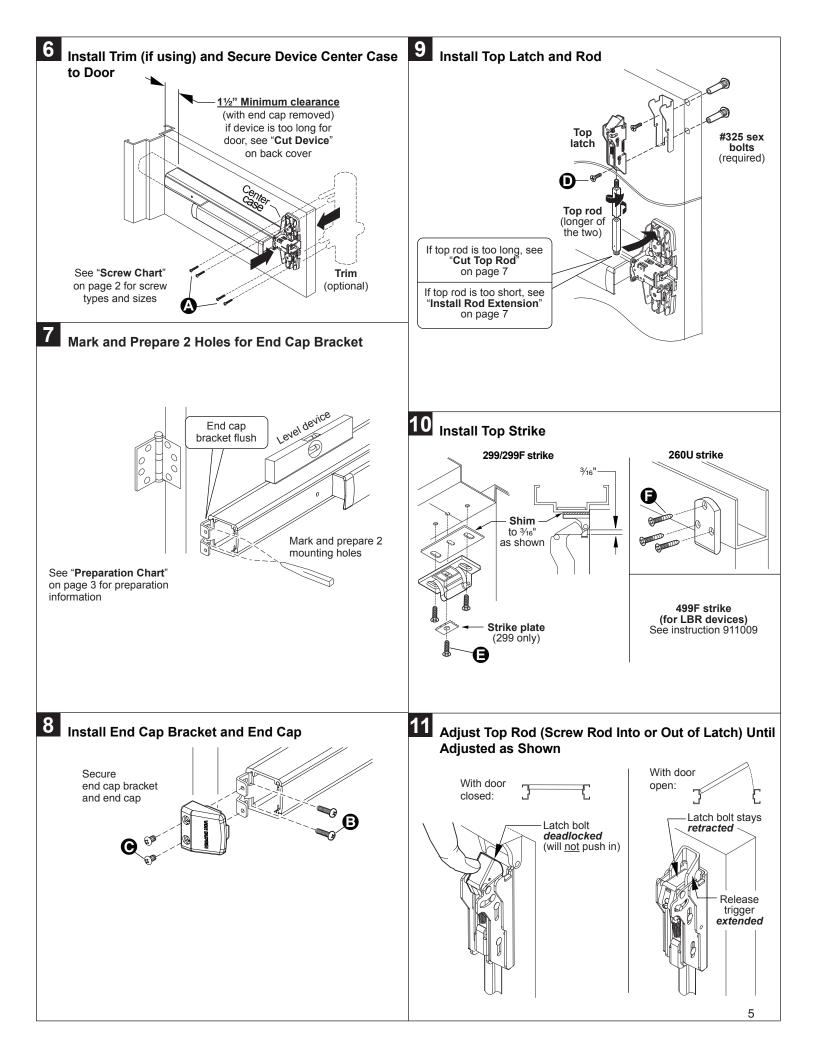


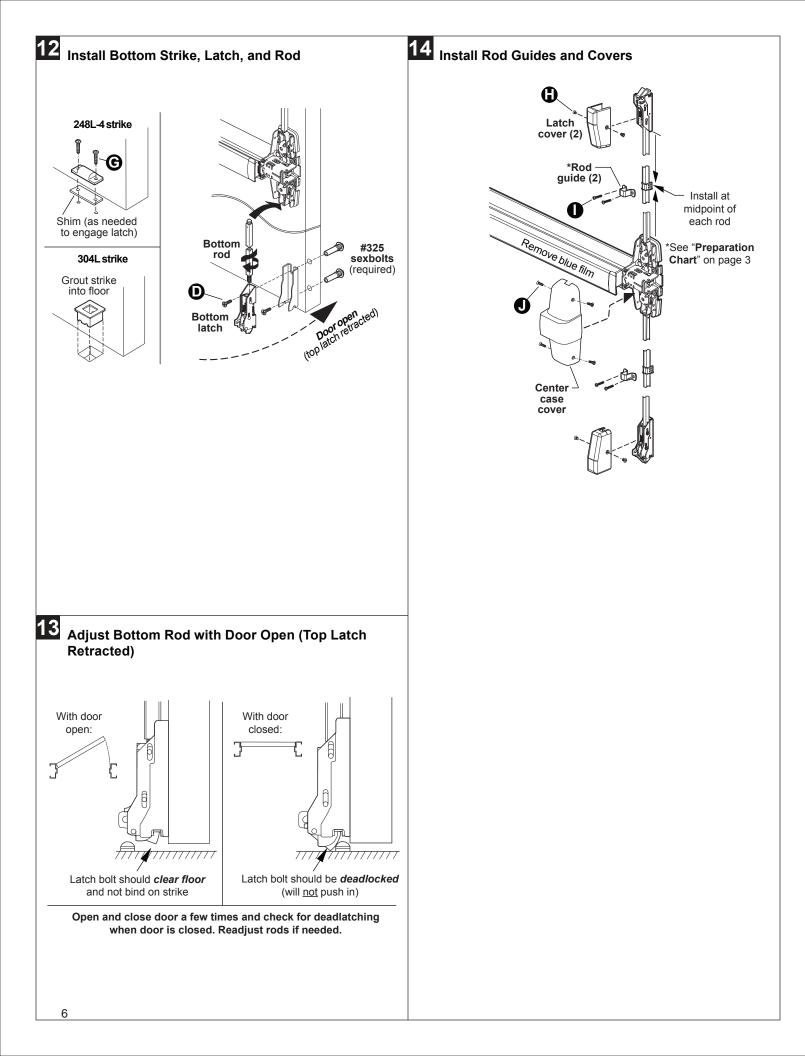


CUT TOP ROD

1. Measure amount to cut off rod as shown below.


Note: Rod cutting is required for doors shorter than 7'.

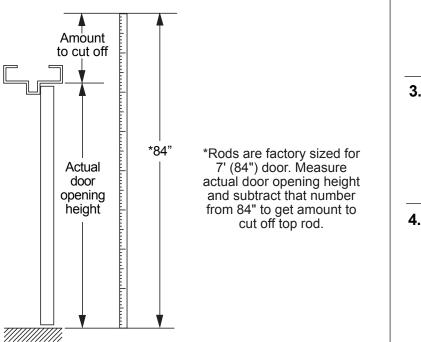

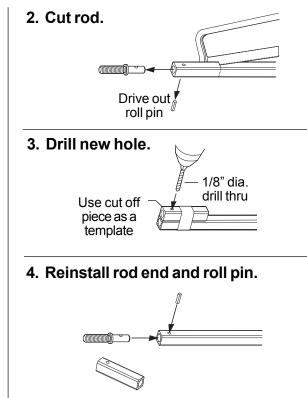

INSTALL ROD EXTENSION

1. Measure door opening to determine 2. Cut rod amount to cut off rod extension. extension. *Standard door heights: Drive out 1 Amount to With no extension 7' (84") roll pin cut off With 1' extension 8' (96") 10' (120") With 3' extension 3. Drill new hole. 1/8" dia. *Rods are factory sized drill thru for door heights shown *96" Use metal template above. Measure actual supplied with extension OR door opening height and (on both sides of rod) subtract that number from *120" 96" (for 1' extension) or 120" (for 3' extension) to Actual 4. Reinstall rod end door get amount to cut off and roll pin. opening extension. height 5. Connect top rod and rod extension. Top rod Rod extension

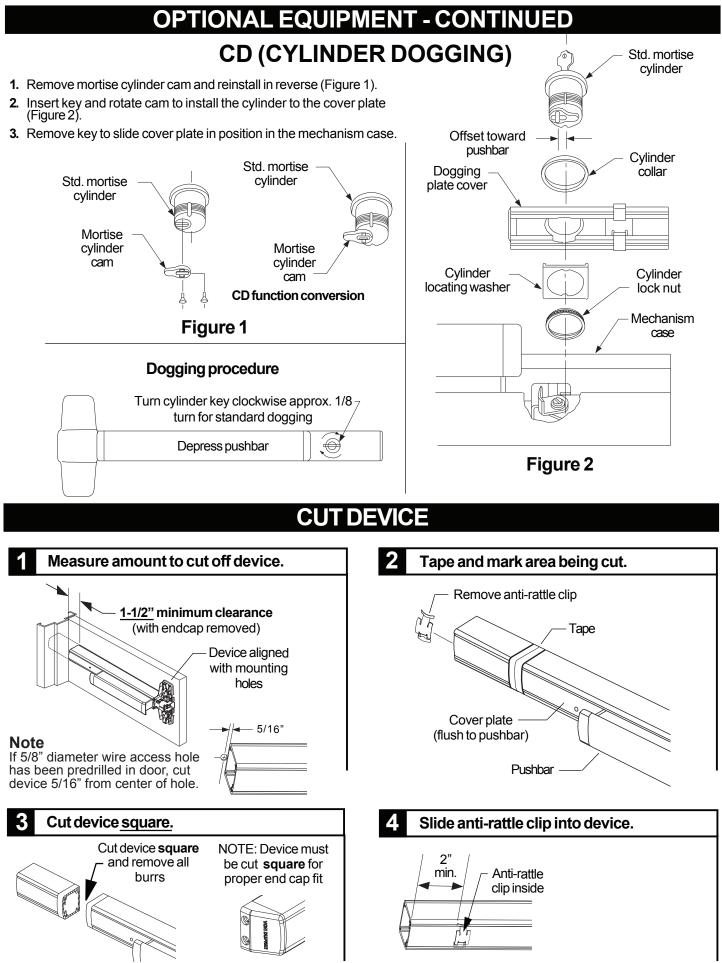



921003-00


994/996L/L-BE


VON DUPRIN

Breakaway™ Trim For Panic and Fire

98/99 Series Rim and Vertical Rod Exit Devices

Installation Instructions

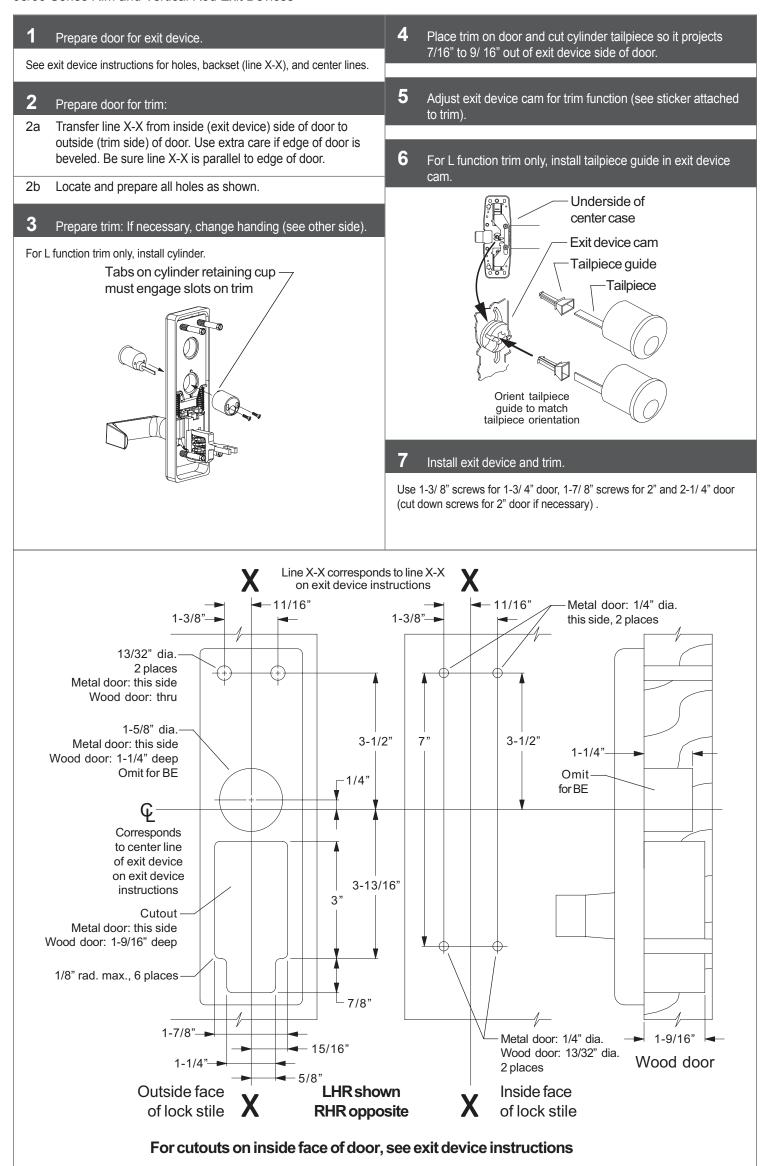

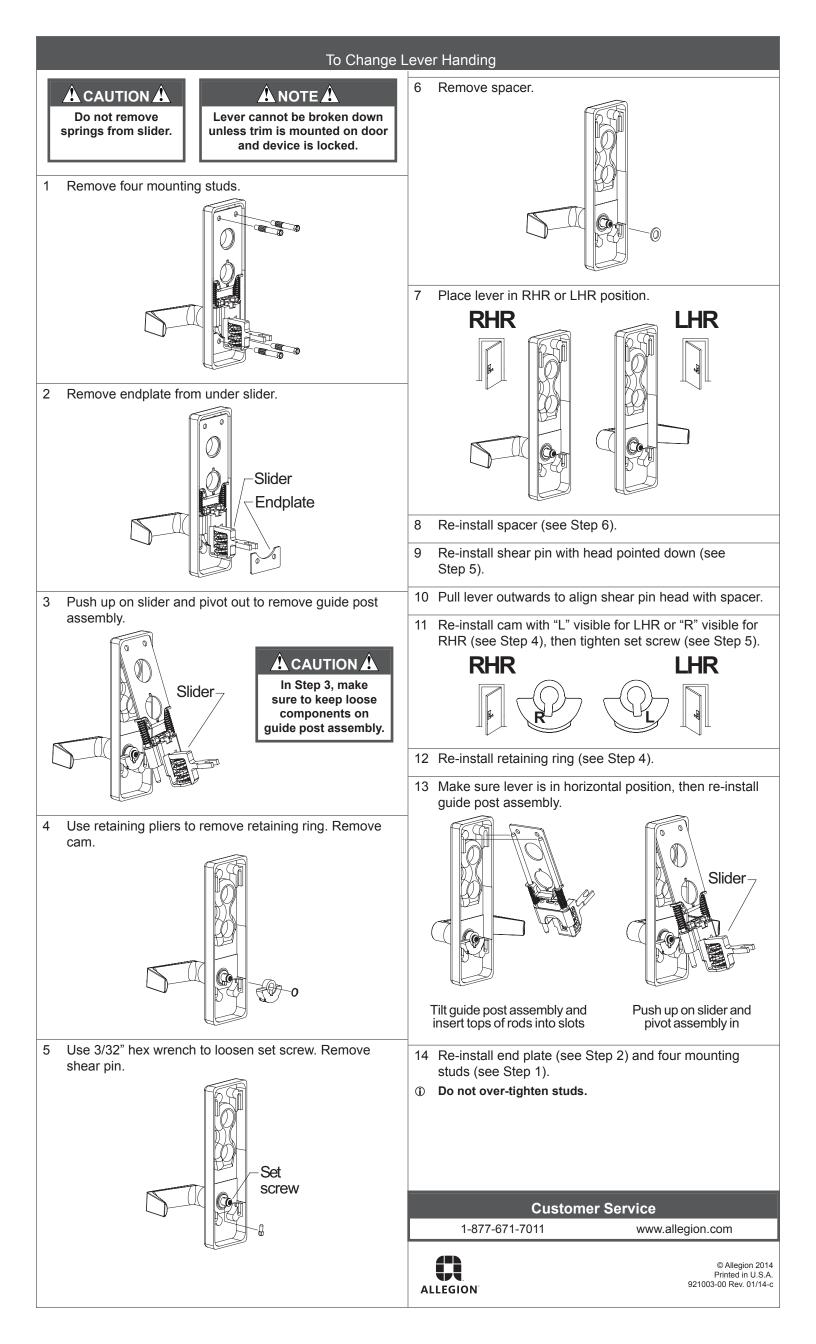



24908386

Conversion Kit

QEL 33A/35A, 98/99 Series


VON DUPRIN.

Installation Instructions

This kit can also be used for motor replacement on existing QEL devices.
 Install according to instructions or device will not function and panic or fire label will be void.
 The QEL wiring must be attached to the fire alarm system if installed on fire exit hardware.


1. This kit converts all 33/35A and 98/99 series mechanical exit devices to quiet electric latch (QEL) retraction devices.

5. If existing device is fire rated or less dogging a QEL baseplate conversion kit is required.

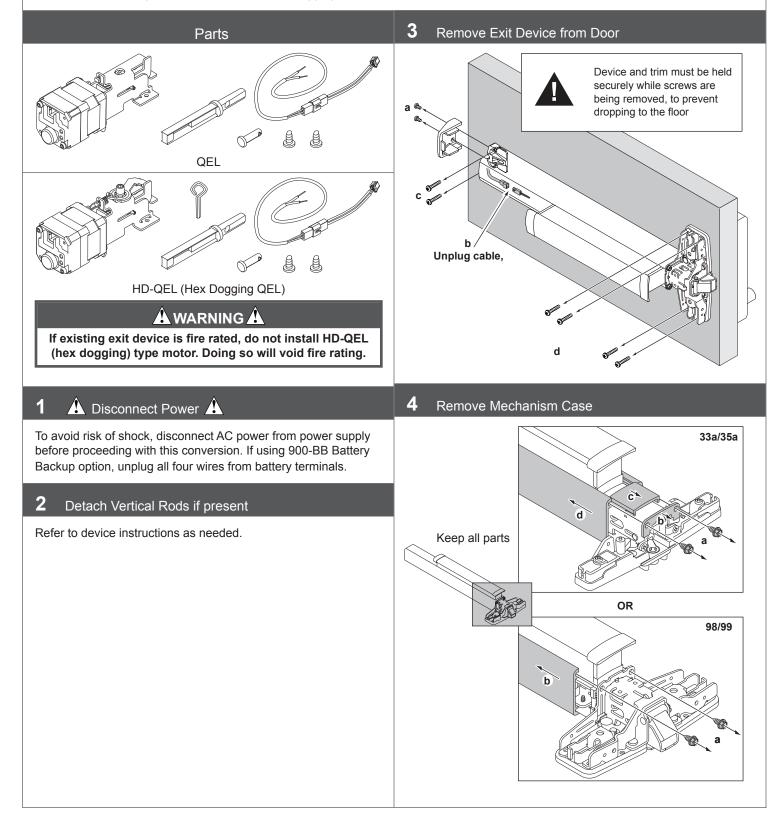


FIRE OR LESS DOGGING DEVICE (Applies to exit devices built after October 2014. Baseplate conversion kit required for earlier devices.)

1. Remove pushpad from baseplate.




2. Install connector and pin.

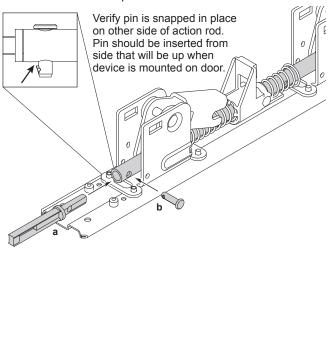


QEL DEVICE (built prior to December 2014)

1. Remove existing QEL motor




2. Discard old QEL motor assembly.




QEL DEVICE (built after December 2014)

1. Remove existing QEL motor.




2. Discard old QEL motor assembly.

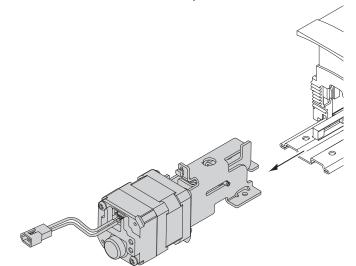


PANIC DEVICE (with dogging assembly)


1. Remove two screws from dogging assembly. If riveted see below.

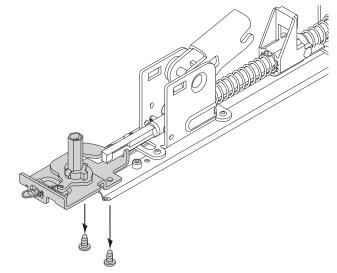


2. Drill or use center punch on two rivet heads until rivets can be removed from baseplate.



3. Remove and discard dogging assembly.

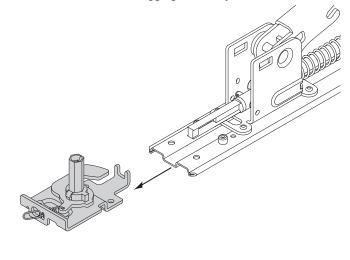


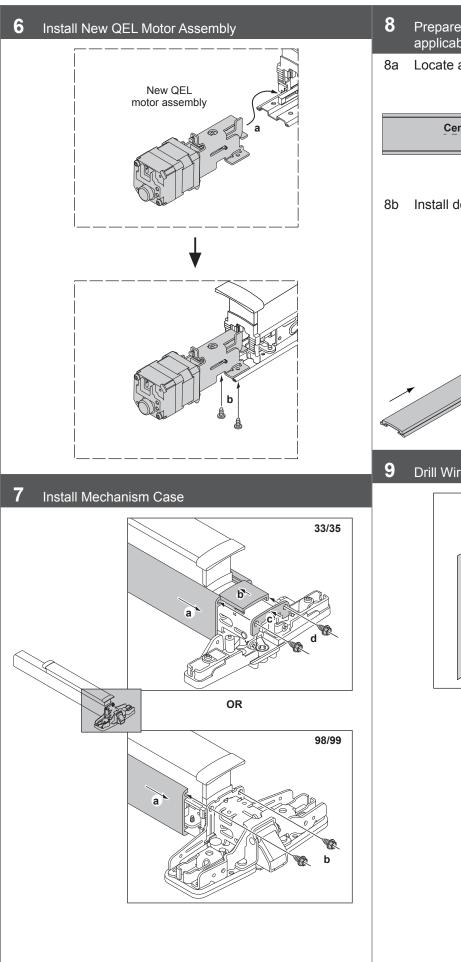


8 Prepare dogging cover for HD dogging key (if applicable and only on panic devices).

8a Locate and drill hole 1/4" Center of Cover Deburr edge of hole 1 1/2" 8b Install dogging cover

9 Drill Wire Access Hole (if required)



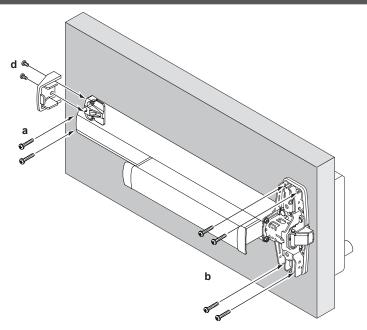



For more detailed installation instructions for specific Exit Devices, visit the Support area of the Allegion website at www.allegion.com/us


11 Confirm Equipment Compatibility

The QEL is compatible with the following equipment (refer to individual instructions as needed):

- PS900-SERIES Power Supplies PS902, PS904, PS906, PS914
- 900-SERIES Option Boards 900-2RS, 900-4R, 900-4RL, 900-2Q
- PS873 Power Supply Plus 871-2, 871-2Q, 873-4TD/AO Option Boards

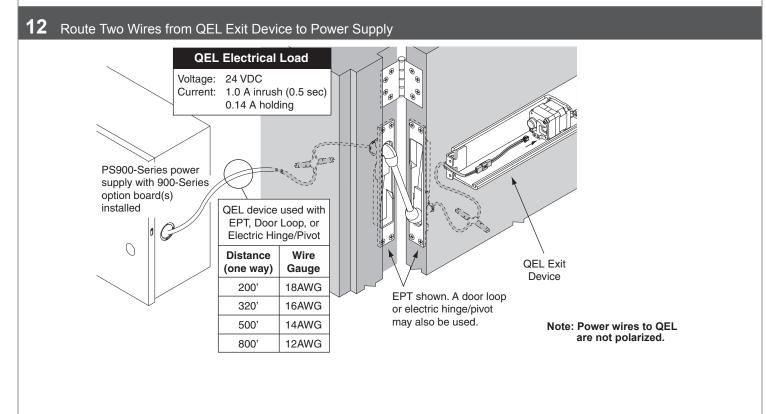

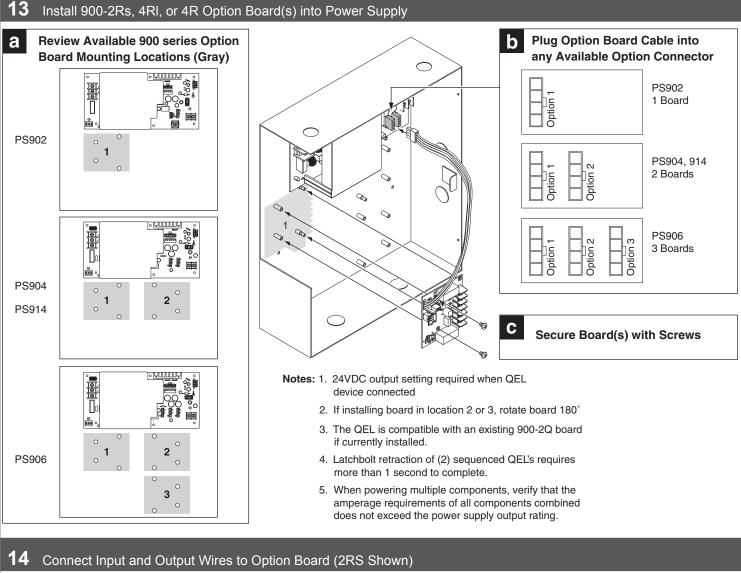

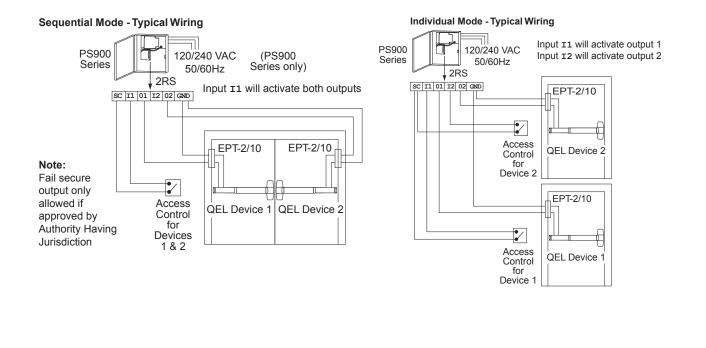


15 Check Operation

- A. Activate each input and verify all QEL devices operate properly.
- B. If any device does not operate properly, see step 16 for troubleshooting.

16 If Necessary, Troubleshoot Operation (LED is only visible with the mechanism cover removed)

Power at the QEL	QEL Response	Condition/Solution	
041/20	LED - Solid green Latchbolt - retracted	Operation normal, latch retracted immediately	
	LED - Solid red after latchbolt attempts to retract multiple times	Latchbolt cannot fully retract mechanically	
		Verify mechanical adjustment (on vertical rod or mortise lock devices if used). Remove and reapply input voltage to reset this condition.*	
24VDC		See Check Mechanical Operation on page 8 as needed.**	
	LED - Flashing green/red Latchbolt - not retracted	Excessive tamper (while power applied, the pushpad was pulled out at least 3 time)	
		Wait 15 seconds and latchbolt will retract again OR remove and reapply power to clear condition	
24VDC low	LED - Flashing green Latchbolt - retracted	Voltage low during latchbolt retraction (latchbolt retracts at reduced force) Wire length is too long, wire gauge is too small or power supply has poor regulation	
29VDC or		Input voltage is too high for proper operation	
greater		Wrong power supply, power supply defective.	
13VDC or lower	LED- Flashing red Latchbolt - will not retract	Input voltage is too low for proper operation	
		Wrong power supply, power supply defective or not set to the proper output voltage.	
		To set, remove AC power from power supply, change power supply setting from 12 to 24VDC, then reapply AC power and verify proper operation.	
0VDC	LED - off	No input voltage	
	Latchbolt - not retracted	Problem with the power supply, control switch or wiring	
0VDC	LED - off	No input voltage	
0,00	Latchbolt - retracted	Mechanical dogging is engaged	


*For information about adjusting exit devices, you can find their installation instructions in the support area at www.allegion.com/us or call Technical Services at 1-877-671-7011

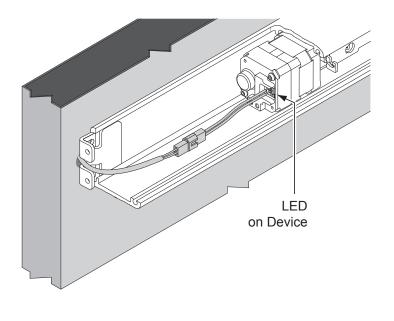

17 Check Mechanical Operation

33A/3527A	98/9927	98/9947WDC
33A/3547A	98/9947	98/9957
		98/9975

- 1. Make sure device is not dogged for SD-QEL / HD-QEL.
- 2. Depress pushbar and make sure latch bolt retracts and extends fully (see Figure 1).
- 3. If latch bolt does not retract or extend fully, adjustments may be required per the device installation instructions.

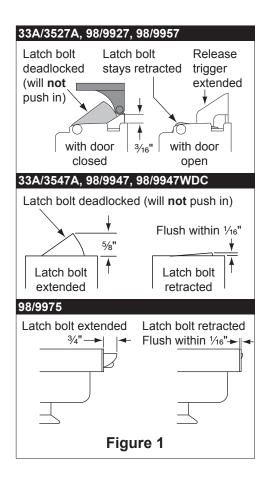

33/3549A	98/9949
33/3550A-WDC	98/9949WDC
	98/9950WDC

- 1. Make sure device is not dogged for SD-QEL/HD-QEL.
- Depress pushbar. Door should begin to open with pushbar depressed halfway.
- 3. Close door. Top latch should be secure. If two point latch, bottom latch should be secure as well.
- If device does not function as described in steps 2 and 3, adjustments may be required per the device installation instructions.

Any HD Device

- 1. Fully depress pushbar.
- 2. Insert hex dogging key and turn clockwise.
- 3. Release pushbar and verify latchbolt remains retracted.
- 4. Fully depress pushbar.
- 5. Insert hex dogging key and turn counter clockwise.
- 6. Release pushbar and verify latchbolt extends fully.