


# ELECTRONIC PANIC LOCK ACCESSORIES:

## FINISH BACK PLATE MODEL 767

Required to conceal the open back of the lock body when mounted on a glass door. Stainless Steel 4.5" x 8.5".



## DOUBLE DOOR KEEPER MODEL 732

Applied to the surface of the inactive leaf of a pair of doors. Plated Case Aluminum 7/8" x 6"



## ARMORED DOOR LOOP MODEL 271

For use with Electrified locks. An easy means for bringing electric current from the hinge side of a door frame to the door. 18" flexible armored cable. End brackets are deep drawn anodized aluminum to conceal wire connections.




## DOUBLE DOOR HOLDER MODEL 44

The Double Door Holder secures the inactive door to the door frame while the active door is closed. Releasing the active door automatically allows both doors to swing freely. Reversible, right or left hand doors. Cast aluminum 8.5" long, 3" wide and 2.5" high.



## BATTERY ELIMINATOR MODEL AC-9

The AC-9 battery eliminator provides constant regulated 9VDC power for Models 250 and 260. It is simple to install and maintenance free. 117 VAC to 9VDC. The AC-9 conserves the battery which automatically takes over as the power source in the event of a power failure or intentional power cutoff.

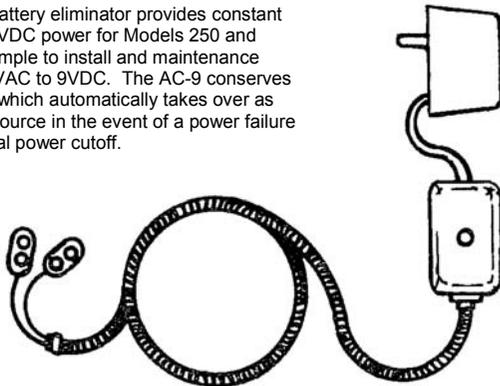

## THUMB TURN MODEL THT



Used instead of cylinder and keys to retract and project the deadbolt from inside.


## OUTSIDE ACCESS DOOR PULL MODEL 707

For access from building exteriors. Installed on the outside of the door and linked to the lock. After deadbolt is retracted by outside key, a slight pull will release the deadlatch and open door. Cast aluminum, 8" x 1.5".



## SINGLE DOOR KEEPER MODEL 730

Supplied for single doors or pairs of doors with mullions.




## CYLINDER FINGER PULL MODEL 711



An inexpensive door pull for use when outside key only access is required.


## RIM CYLINDER MODEL CER-OK



Used to lock and unlock all our exit and panic alarm locks from outside. Includes two keys for outside key control (KA or KD).

## LATCH HOLDBACK DEVICE MODEL 747

An integral lock modification which "dogs" the latchbolt to provide a hold-open function. Simply depress the latchbolt beyond the face of the lock and it will remain retracted until the door is relocked by key..



## STANDARD FEATURES FOR 250 & 260 SERIES

- UNIT IS NON-HANDED
- DEADBOLT WITH HARDENED STEEL INSERT
- DEADLATCH FOR EASY ACCESS FROM INSIDE WITHOUT ALARM
- DEADBOLT CAN BE OPERATED BY OUTSIDE KEY
- LOCK ONLY REQUIRES 5 TO 10 LBS. OF FORCE TO OPERATE
- CAN BE USED FOR SINGLE OR DOUBLE DOORS
- LOUD DUAL PEZO HORN
- SELECTABLE - CONTINUOUS OR TWO MIN. ALARM SHUTDOWN
- DISARMING BEEP WHEN BOLT IS RETRACTED WITH KEY
- LOW BATTERY BEEP WHEN BATTERY NEEDS TO BE REPLACED
- RETRIGGERABLE ALARM AFTER TWO MIN. SHUTDOWN FOR MODEL 260 ONLY