

Trilogy Mortise: High security digital locks



Trilogy® high security mortise locks with and without prox ID readers


DL3500 Series Mortise Locks

- 300 User codes: Master, manager, supervisor & basic users
- Fingertip or Windows PC-programmable
- Real time clock enables up to 500 scheduled events and holiday schedules
- 40,000 Event audit trail provides a printed time/date- stamped log of all electronic activity
- Long-life battery pak for 80,000 cycles, typical and low-battery alert
- Choose either classroom or deadbolt versions and left or right handing (If reverse hand is required, lock is field reversible.)
- 1 3/8" (3.5 cm) mortise cylinder supplied card enrollment mode allows many cards to be quickly added without PC –also– downloadable from PC or prox enroller tool
- 40,000 event audit trail log
- 500 scheduled events, e.g., lock or unlock
- PC programming/reporting
- Quick passage mode (without being in program mode)
- Program data transferred to lock via AL-PCI2 or AL-DTMIII
- 5AA battery-pak operated; 75,000 cycles, typical
- 3 Architectural finishes (US3 polished brass, 26D satin chrome, 10B duronodic)
- Weatherproof -31° to +151°F (-35° to +66°C)

PDL3500 Series

PDL3500 Series mortise lock with built in HID prox reader, similar to DL3500 Series, but with:

- 2000 user codes (3-6 digits) and/or HID prox cards/fobs
- Multilevel security - Master; manager; supervisor; basic users
- Easy Tap & Add batch prox ID card enrollment mode allows many cards to be quickly added without PC –also– downloadable from PC or prox enroller tool
- PC programming/reporting
- Quick passage mode (without being in program mode)
- Program data transferred to lock via AL-PCI2 or AL-DTMIII
- 5AA battery-pak operated; 75,000 cycles, typical
- 3 Architectural finishes (US3 polished brass, 26D satin chrome, 10B duronodic)
- Weatherproof -31° to +151°F (-35° to +66°C)

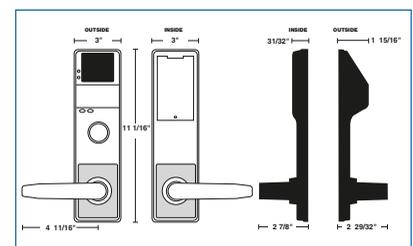

Cylindrical Models DL4100 and Prox/PIN Lock PDL4100 Versions also available

Trilogy audit trail and programming

AL-IR1 Infrared Printer

- Prints the event log and user code with hand-held convenience.

AL-DTMIII Data Transfer Module

- Module used to transfer program data from the PC to the lock and receive Audit Trail from the lock. Can transfer program data for up to 200 locks.

AL-PRE

- Alarm Lock Prox Reader/Enroller (For Use With Prox Lock) Prox Card Reader/Enroller Enables instant, automatic enrollment of Prox Cards into DL-Windows (just tap the Prox Card/fob device to the unit's faceplate to enroll)! Supports all prox cards and prox keyfobs. Simultaneous card enrollment, downloading or lock polling – all on just one serial port. Replaces AL-PCI. 9V Battery operation (6 mos. to 1 year, typical).

DL-WINDOWS SOFTWARE

- Windows-format software used to create programming, manager, users and schedules, receive audit trail from lock, program the lock using PC or laptop, program the AL-DTMIII to program multiple locks and configure the AL-DTMIII to transfer data.
- Free download at www.alarmlock.com

AL-PCI2 (not shown)

- Interface cable interconnects lock and PC for data transfer. (AL-PCI also includes DL-WINDOWS CD)

AL-PCI2U, (shown) as above, with USB interface cable



Trilogy & Networx ordering information

Cylindrical Trilogys

DL 27 00 WP IC /26D -Y

Model/Series:

DL27 = DL2700 Series
DL28 = DL2800 Series
DL30 = DL3000 Series
DL32 = DL3200 Series
DL52 = DL5300 Series
PDL30 = PDL3000 Series
PDL53 = PDL5300 Series

Networx Wireless:

DL6100 PIN Series;
PDL6100, 7100 PIN/Prox

Trim:

00 = Lever
75 = Regal Curved Lever

Exterior/Interior Use:

For Exterior use of DL2700 & DL3000 only, order WP for weatherproof use. All other models are weatherproof as standard.

Cylinder:

IC = Standard Interchangeable Core Prep for Best, Falcon, Arrow, KSP
(Note: No "IC" indicates standard K.O. cylinder.)

Finish:

/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)

Special Order IC Prep:

-Y = Yale
-M = Medeco
-R = Sargent
-C = Corbin/Russwin
-S = Schlage

Mortise Trilogys

DL 35 00 DB R /26D EX

Model & Series:

DL35 = Trilogy T3 Mortise Series

Networx Wireless:

DL6500 PIN; PDL6500 PIN/Prox

Trim:

00 = Standard Lever
75 = Regal Curved Lever (U.S. Option Only)

Lock Body:

DB = Dead Bolt
CR = Class Room (U.S. Only)

Handing:

Your Door -	Order -
Left Handed	L
Right Handed	R
Left Hand Reverse Bevel	R
Right Hand Reverse Bevel	L

Finish:

/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)

European Model Suffix

Not Used For U.S. Models
*Note: Standard Lever for U.S. Models is Straight Lever. Standard Lever for European Models is Curved Tubular Lever

(Note: Trim is non-handed. Lock body is field reversible.)


Choice of three Trilogy finishes



US3
Polished Brass



US26D
Satin Chrome



US10B
Duronodic

U.S. Handing options



00 Straight Lever



75 Regal Curved Lever



25 Turnpiece
50 Knob available on
DL1250/1350

Matching Trilogy & Networx Keypad models, see pgs 14 & 17

Trilogy Narrow Style

DL1200/26D1

Model Type

PDL – Prox/PIN
DL – Digital PIN

Trilogy Series

12 – 2700 Series
13 – 3000 Series

Trim

00 = Lever
25 = Turnpiece
50 = Knob
75 = Regal lever

Finish

/26D Satin Chrome
/10B Duronodic
/MS Metallic Silver
/MB Metallic Bronze

Mechanical Dead Latch

1 – Supports Adams Rite: 4710, 4730, 4900 Series
2 – Supports Adams Rite: 4070, MS1850S, MS1850S-050, MS1950, MS1950-050
3 – KIT Includes Adams Rite 4900 with 1-1/8" backset, 628 & 313 faceplate
4 – KIT Includes Adams Rite 4900 with 1-1/2" backset, 628 & 313 faceplate

Trilogy Exit

ETPDL- 1 R/ 26D V99

Type:

PDL = Digital with Prox
PL = Prox Only
DL = No Prox
N = (suffix) Networx Wireless

Door Thickness:

1 = 1 3/4" + 1/8"
2 = 2" to 2 3/4"
3 = 3" to 4"

Handle:

R = Regal
S = Straight

Finish:

/3 = US3 Polished Brass
/26D = US26D Satin Chrome
/10B = Duronodic (Special Order)

OEM Trim

V99 = Von Duprin 99
C50 = Corbin ED5000 & Yale
D93 = Dorma 9300
A38 = Arrow 3800
S88 = Old Style Sargent
N58 = New Style Sargent
P11 = Precision 1100
CR8 = Cal Royal 9800