

MODEL 280

Application

- Half Surface
- Handed




ANSI/C07501

Product Description & Features

- Flush door and frame application only
- Optional top pivot where door portion cannot be mortised
- Available for fire door assemblies (ferrous material) – specify F280
- Non-ferrous base material
- 3/4" (19mm) offset (measured from centerline of pivot to face of door)
- 1-3/4" door only
- Contact factory if door is not flush
- Furnished with wood and machine screws
- Available with longer than standard pivot pins. Increments are 1/4" (6mm), 1/2" (13mm), 3/4" (19mm) only

Technical Information

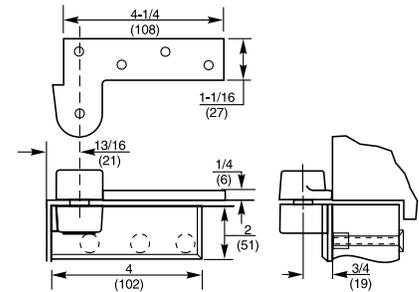

MODEL 380

Application

- Half Mortise
- Handed



ANSI/C07511

Product Description & Features

- Flush door and frame application only
- Optional top pivot where jamb portion cannot be mortised
- Designed for channel iron door frames with aluminum, hollow metal or wood doors
- Available for fire door assemblies (ferrous material) – specify F380
- Door portion from L180 pivot is available if lead-lined doors are used – specify L380 and door thickness
- Non-ferrous base material
- 3/4" (19mm) offset (measured from centerline of pivot to face of door)
- Furnished with wood and machine screws
- Available with longer than standard pivot pins. Increments are 1/4" (6mm), 1/2" (13mm), 3/4" (19mm) only

Technical Information

