

MODEL 989

**Application**


- Wall Mount
- Low Profile
- Concealed Wiring
- ANSI/C00011

**Product Description & Features**

- Total Projection: 7/16" (11mm)
- Mounting Requirements: 2" x 4" x 2-1/2" (51 x 102 x 64mm) outlet box
- Wall must be properly reinforced and outlet box adequately fastened

**Technical Information**

- Voltage and Current:
  - 120VAC, 60Hz., .020 amp
  - 24VAC/DC, 60Hz., .020 amp
  - 12VDC, .040 amp
- For 50-55 lbs. of holding force, specify voltage
  - 120VAC, 60Hz. .017 amp
  - 24VAC, 60Hz. .080 amp
  - 24VDC, .068amp
  - 12VDC, .180amp
  - 240VAC, 50/60Hz. .009 amp
- Shipping Weight: 2 lbs. (0.9 kg)

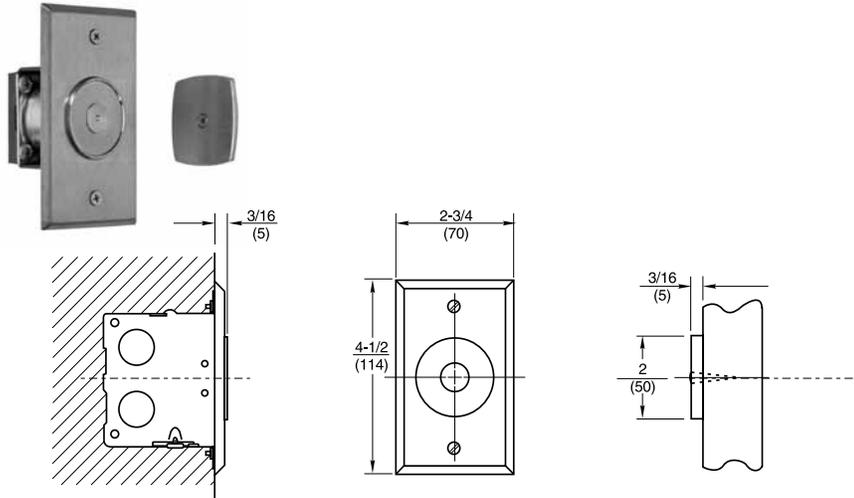

MODEL 990

**Application**

- Wall Mount
- Low Profile
- Concealed Wiring
- ANSI/C00011

**Product Description & Features**

- Total Projection: 1-13/16" (46mm)
- Mounting Requirements: 2" x 4" x 2-1/2" (51 x 102 x 64mm) outlet box
- Wall must be properly reinforced and outlet box adequately fastened

**Technical Information**

- Voltage and Current:
  - 120VAC, 60Hz., .020 amp
  - 24VAC/DC, 60Hz., .020 amp
  - 12VDC, .040 amp
- For 50-55 lbs. of holding force, specify voltage
  - 120VAC, 60Hz. .017 amp
  - 24VAC, 60Hz. .080 amp
  - 24VDC, .068amp
  - 12VDC, .180amp
  - 240VAC, 50/60Hz. .009 amp
- Shipping Weight: 2 lbs. (0.9 kg)

