

MODEL 994

Application

- Wall Mount
- Adjustable Armature
- Concealed Wiring
- ANSI/C00011






Product Description & Features

- Total Projection: 3-3/4" (95mm)
- Adjustable armature rotation up and down, back and forth for better alignment.
- Cannot be use with 900 base or spacers.
- Can be used without adjustment piece making it a model 997
- Mounting Requirements:
2" x 4" x 2-1/2" (51 x 102 x 64mm) outlet box
- Wall must be properly reinforced and outlet box adequately fastened

Technical Information

- Voltage and Current:
 - 120VAC, 60Hz., .020 amp
 - 24VAC/DC, 60Hz., .020 amp
 - 12VDC, .040 amp
- For 50-55 lbs. of holding force, specify voltage
 - 120VAC, 60Hz. .017 amp
 - 24VAC, 60Hz. .080 amp
 - 24VDC, .068amp
 - 12VDC, .180amp
 - 240VAC, 50/60Hz. .009 amp
- Shipping Weight: 2 lbs. (0.9 kg)

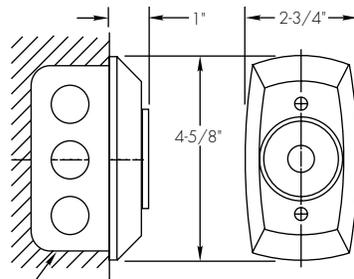

MODEL 996

Application

- Wall Mount
- Surface Wiring
- ANSI/C00011



Product Description & Features

- Total Projection: 4-1/8" (105mm)
- Mounting Requirements:
1-1/2" (38mm) deep adapter housing
- Wall must be properly reinforced

Technical Information

- Voltage and Current:
 - 120VAC, 60Hz., .020 amp
 - 24VAC/DC, 60Hz., .020 amp
 - 12VDC, .040 amp
- For 50-55 lbs. of holding force, specify voltage
 - 120VAC, 60Hz. .017 amp
 - 24VAC, 60Hz. .080 amp
 - 24VDC, .068amp
 - 12VDC, .180amp
 - 240VAC, 50/60Hz. .009 amp
- Shipping Weight: 3 lbs. (1.4 kg)

