

# B1921 | B1923

## Reinforcing Pivots

B1921, B1923 Reinforcing Pivots provide an economical way to transfer load from hinges of sagging hollow metal or wood doors.

Hollow  
Metal

Wood

## Function

This full-surface reinforcing pivot adds years of life to openings where the hinges or hinge reinforcements have failed. Reinforcing pivots take the load off the top hinge and transfer it to screws that are in shear so they will not pull off. The quick and economical way to solve door sag problems.

## Features

### Type

Full surface reinforcing pivots for flush doors.

### Finish

Zinc plating over steel.

### Materials

Heavy duty 3/16" [4.8 mm] cold-rolled steel.

### Cycle Testing

1,500,000 cycles

### Capacity

Supports weights up to 300 lbs [136.08 kg]

### Hole Pattern

Symmetrically located. Non-handed.

### Hinge Size

**B1921:** designed with 1/2" [12.7 mm] offset to match the pivot point of a 4" [101.6 mm] wide butt hinge.

**B1923:** designed with a 3/4" [19.1mm] offset to match the pivot point of a 4-1/2" [114.3 mm] wide butt hinge.

### Standard Package

Comes complete with all necessary fasteners. Optional tamper-proof screw available.


### Shipping Weight

1-1/2 lb [0.68 kg]

## Dimensions


### B1921

Side View

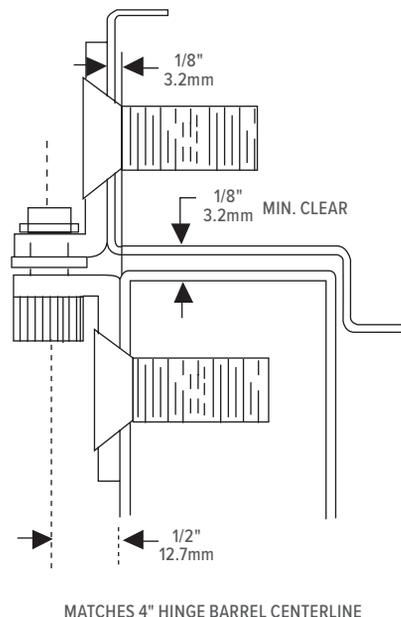


### B1923

Side View

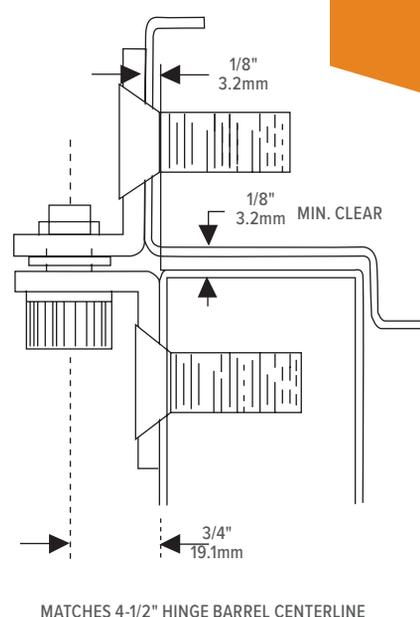

## Installation

### B1921 | B1923 Pivot Assembly

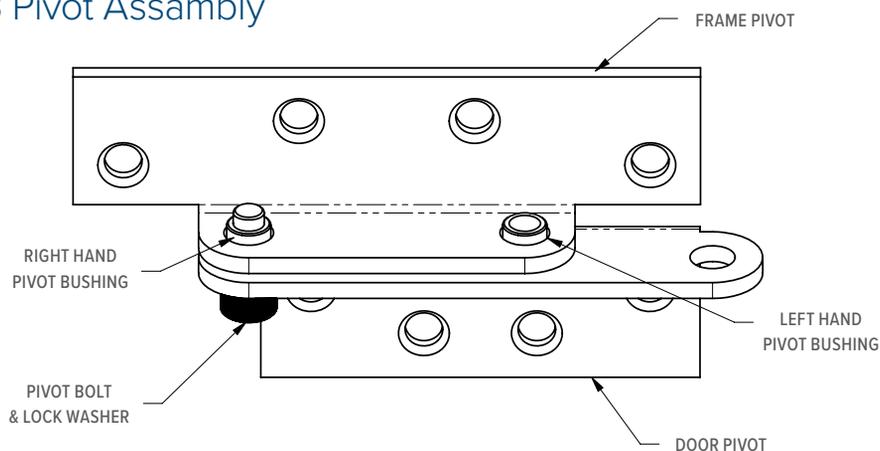

## How to Order & Related Products

**B1921 | B1923 Reinforcing Pivots:** Specify quantity and the following information. Order related products separately.

MODEL	HINGE SIZE
B192	1
	1 4"
	3 4-1/2"

### RELATED

When purchasing this product, please consider the following related products, available separately:

ACCESSORIES
Tamper proof screws
B-133 Large Oilite bronze bushing
P-133 Large socket head pin and washer

Experience a safer  
and more open world

